


**The 80s called.  
They want their IR back.**

The Just Add Power Flux Capacitor IR Dongle provides IR control of endpoint devices through the Just Add Power 2G and 3G product lines.

- **Connects to RS232 port on a Receiver or Transmitter**
- **Converts RS232 into an IR signal**
- **Compatible with Pronto and Global Cache IR codes**
- **Conveniently powered through Receiver USB port**




**It's all under control.** Use the Flux Capacitor IR Dongle combined with Just Add Power drivers to control all of your IR devices over a single IP connection. Each IR Dongle becomes an additional IR port on the control system!

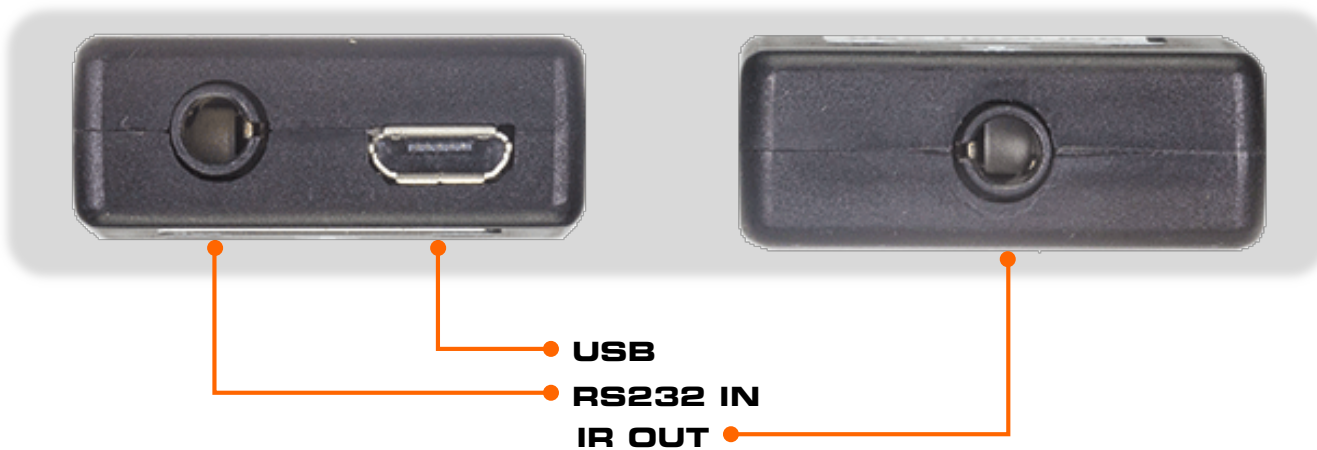



<b>Compliance</b>	RoHS/FCC/CE
<b>Operating Temp</b>	0-60 °C / 32-140 °F
<b>Dimensions &amp; Weight</b>	39 x 28 x 10 mm 1.5" x 1.1" x 0.4" 28 g / 1 oz
<b>Ports</b>	USB micro (power) 3.5mm (IR out) 3.5mm (serial in)
<b>Power Supply</b>	DC5V, 0.5A minimum USB micro
<b>PoE</b>	N/A



All measurements in millimeters (mm)

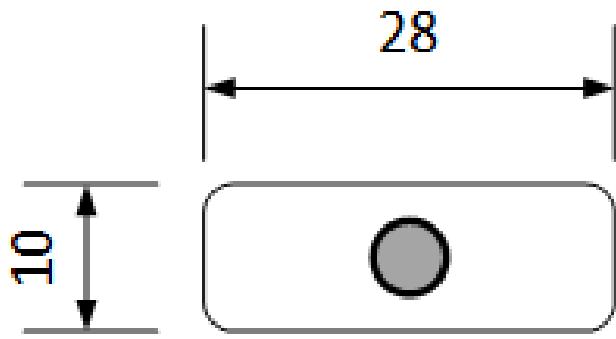

IRD Front/Back

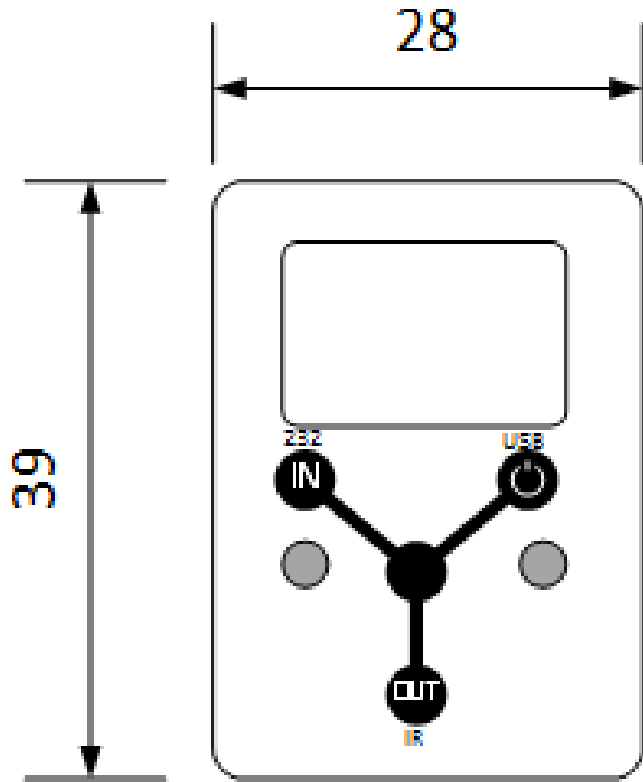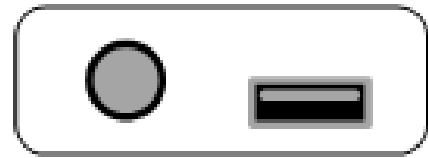

IRD Bottom

