# 3G ULTRA VBS-HDIP-508POE



## 4K Standard Receiver

The Just Add Power 3G Ultra 508POE Receiver distributes 4K video and supports all lossless audio formats over a single Catx cable.

The 508POE receives and processes a 4K or lower-resolution source from a Just Add Power Transmitter and distributes video to the designated display; features enchanced image play: image push, image pull, and image pop - along with all the 4K Receiver system wide features from the 3G Ultra product line.



### **Features**

**HDCP 2.2 Support** Display content with HDCP 2.2

copy/content protection on any

HDMI screen in system

**Image Pop** Display a custom logo or

message as an overlay on any

active screen

Image Push Load a custom default image

or logo for when no source is

displayed onscreen

Image Pull Preview an image from any

source or display in any web browser or control system - up

to 10 fps

Integrated Endpoint Co

Control

Control endpoints with RS232,

IR and CEC

**Scalability** Fully compatible with all 3G Ultra

and 2G Omega products


**Video Rotation** Rotate your video by 90° for

portrait or landscape display


## 3G ULTRA VBS-HDIP-508P0E



#### Front of Device:

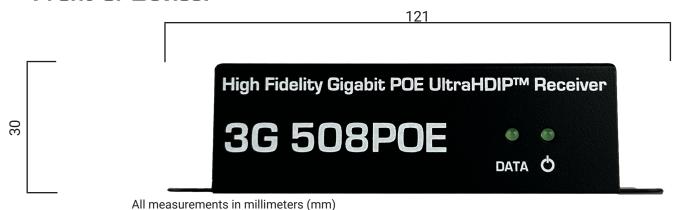

#### **Back of Device:**

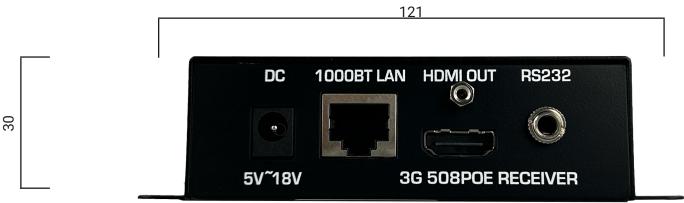

All measurements in millimeters (mm)

### **Specifications**

Bandwidth	180-500 Mbps	POE	IEEE 802.3af (15.4W)
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI Out 3.5mm RS232 w/null modem
Dimensions & Weight	121 x 30 x 125 mm 4.8" x 1.2" x 4.9" in 0.27 kg / 0.6 lb	Power Supply	5V-18V
Encryption	AES-128 Encryption	(not included)	5.5mm/2.1mm, Positive tip
		Supported	Up to 4096x2160
Operating Temp	0-60 °C / 32-140 °F	Resolutions	(interlaced & progressive)