

The new standard in HDMI matrix technology

The Just Add Power 2G+ Enhanced PoE Transmitter has all of the features of 2G models, with these hardware additions:

- **Stereo output with audio delay**
- **CEC Control**
- **USB 2.0 over IP**
- **Null Modem-integrated RS232**
- **HDMI Pass-through**


Mix-and-match! The 2G+ Enhanced PoE Transmitter features are fully compatible with all 2G and 2G+AVP models. Enhance an installation by adding 2G+ pieces wherever additional features are needed.




Compliance	HDCP & RoHS/FCC/CE
Operating Temp	0-60 °C / 32-140 °F
Supported Resolutions	Up to 1080p50/60 Hz PC: 1920 x 1200
Dimensions & Weight	199 x 31 x 127 mm 7.8" x 1.2" x 5.0" 0.5 kg / 1.0 lb
Ports	HDMI Out HDMI In Ethernet connector 3.5mm Stereo Out 3.5mm RS232 w/ null modem Micro-USB
Bandwidth	Up to 150 Mbps
Power Supply (not included)	DC5V, 2A minimum 5.5mm/2.1mm, Positive tip
PoE	10 watts maximum




Features	
Compatible with all 2G products	
CEC control	
Locking HDMI cable	
HDMI Pass-through	
RS232 with integrated null modem	
Stereo audio output + 170ms audio delay	
USB 2.0 over IP	
All 2G features	
• Stereo or multi-channel audio	
• Instant-seamless Switching	
• Video Wall	
• Image Pull	
• 2-way RS232 control	

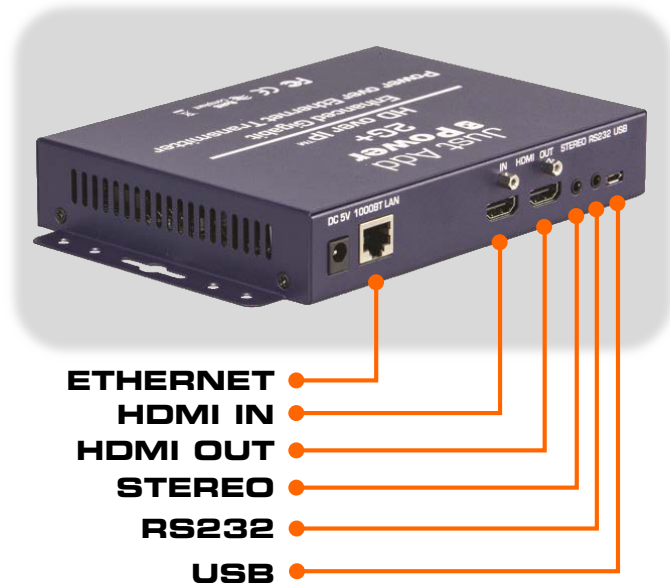

All measurements are in millimeters (mm)

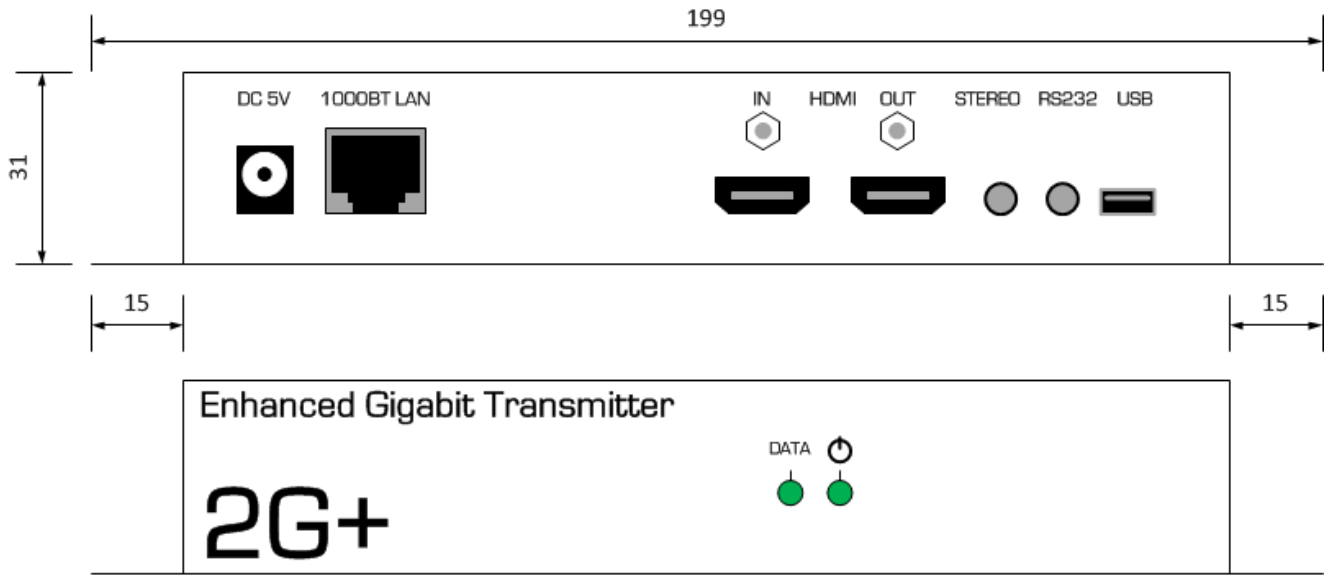

418PoE Front/Back

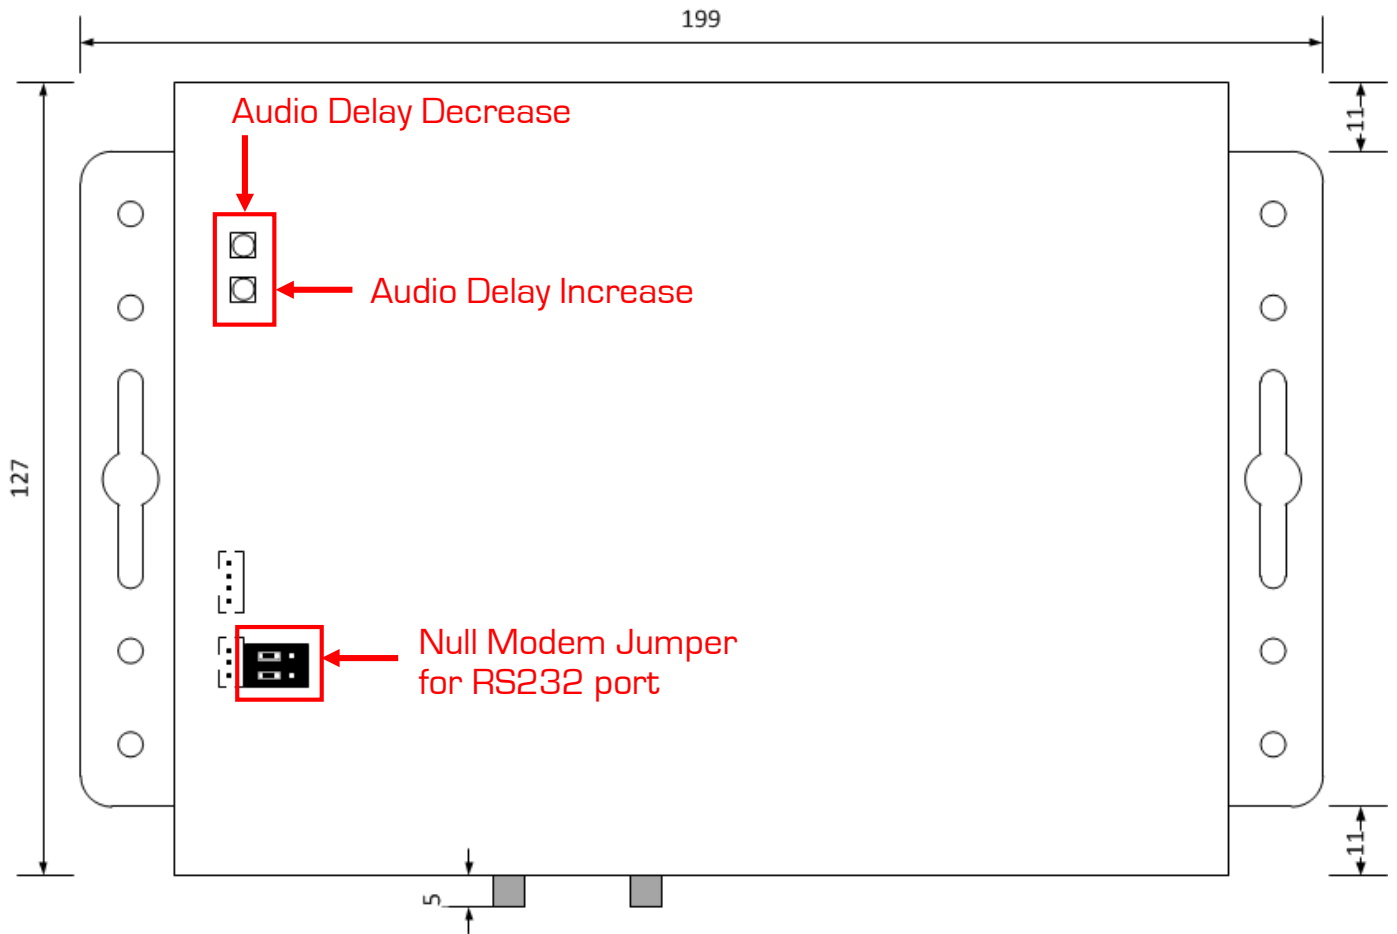

418PoE Bottom